

PHILIPP GROUP

PHILIPP Power Box System



VB3-V-002-en - 01/16

Installation Instruction

Transport and mounting systems for prefabricated building

■ Technical department

Our staff will be pleased to support your planning phase with suggestions for the installation and use of our transport and mounting systems for precast concrete construction.

■ Special designs

Customized to your particular needs.

■ Practical tests on site

We ensure that our concepts are tailored precisely to your requirements.

■ Inspection reports

For documentation purposes and your safety.

■ On-site service

Our engineers will be pleased to instruct your technicians and production personnel at your plant, to advise on the installation of precast concrete parts and to assist you in the optimisation of your production processes.

■ High safety level when using our products

Close cooperation with federal materials testing institutes (MTIs), and official approvals for the use of our products and solutions whenever necessary.

■ Software solutions


The latest design software, animated videos and CAD libraries can always be found under www.philipp-gruppe.de.

■ Engineering contact

Phone: +49 (0) 6021 / 40 27-318
Fax: +49 (0) 6021 / 40 27-340
E-mail: technik@philipp-gruppe.de



■ Sales contact

Phone: +49 (0) 6021 / 40 27-300
Fax: +49 (0) 6021 / 40 27-340
E-mail: vertrieb@philipp-gruppe.de



Content

■ System components	Page 4
■ Application	Page 5
■ Design and construction	Page 6
■ Reinforcement	Page 7
■ Design example	Page 8
■ Installation	Page 9
■ Preparation	Page 9
■ Mounting	Page 10
■ PHILIPP Grouting mortar	Page 11
■ Software / CAD	Page 13
■ General notes	Page 14

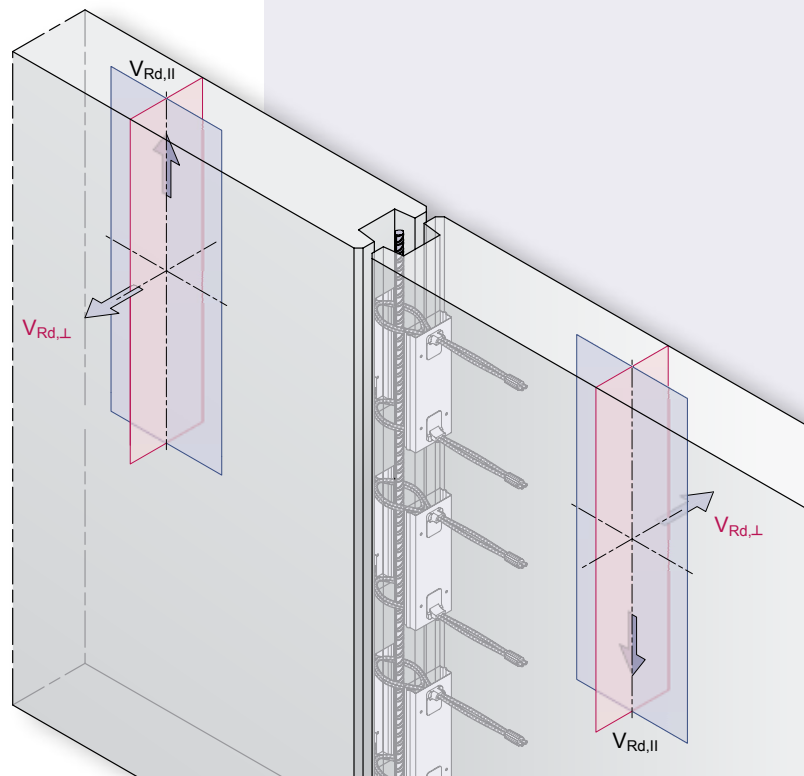



System components

Advantages at a glance:

- Flexible connecting elements
- No complicated “rebend” required
- High bearing capacity
- Shear forces right-angled and parallel to the joint possible
- Simple design due to shear force data per Power Box
- Cost-optimized due to stackable transport packaging
- Optimal utilization because of variable number of Power Boxes per joint
- Box cover recyclable
- Stable box cover also suitable for hot bonding
- Weatherproof box cover
- Approved by DIBt (Deutsches Institut für Bautechnik, Germany, www.dibt.de)

System components and dimensions

The Power Box System is used for the connection of precast concrete units where a transfer of high loads and a proof for it is required. It is able to transfer shear forces parallel and right-angled to the wall safely into the concrete unit (see page 3). Its simple installation by means of a timber board ensures a practice-oriented application.

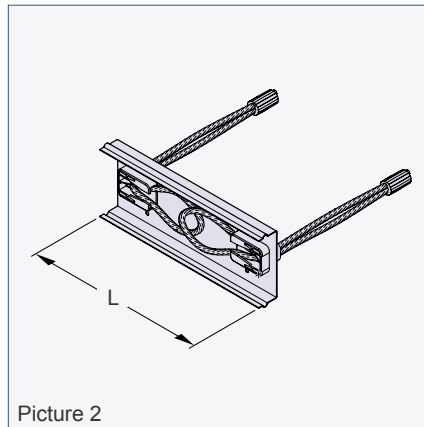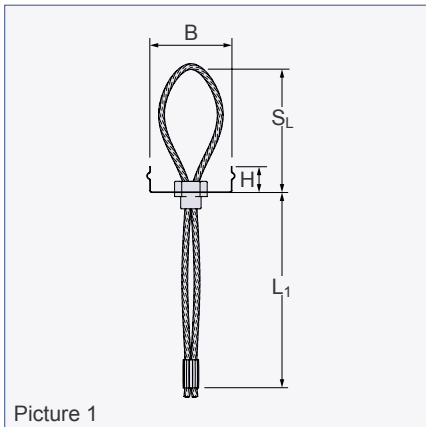

The Power Box System is optimally harmonised and consists of:

- The galvanised Power Box including a high-capacity, flexible steel wire rope and a plastic cover
- High-strength, free-flowing grouting mortar (Picture 3)

Table 1: Dimensions of the Power Box

Ref.-No.	Dimensions [mm]					PU	Weight
	S_L	B	H	L	L_1	[pcs.]	[kg/PU]
54PB120	120	80	25	220	190	100	42.0


Application

Geometry of precast units

The reinforced concrete elements must have a minimum thickness of 14 cm. If shear forces right-angled to the joint have to be transferred the wall thickness must be increased to 18 cm. In general, a maximum joint height of 3.5 m is allowed.



Higher joints are possible if the subsequent grouting of the joint is made step-by-step in sections of 3.5 m with a grouting hose.

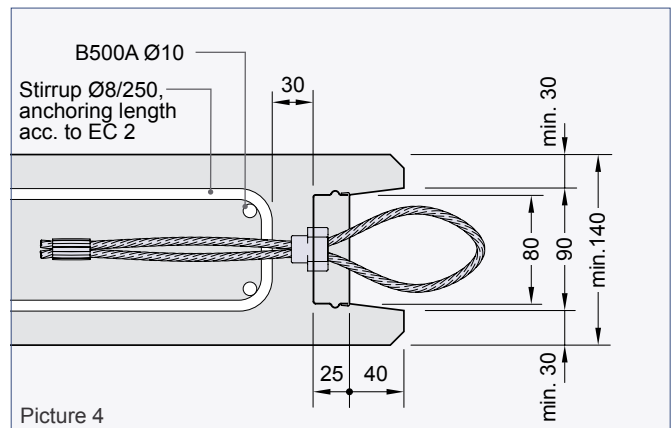


Picture 4


Range of applications and examples

The Power Box System can be used for almost all connections of reinforced precast concrete wall elements. Primarily, it transfers static shear loads parallel or right-angled to the wall. Tensile forces in the joint (along the wall) have to be excluded or taken by appropriate static or constructive measures.


The Power Box System can be used if it is proofed for particular applications that the control of the crack width in the joint is fulfilled according to EN 1992, table 18, or the corrosion protection is ensured by other measures.

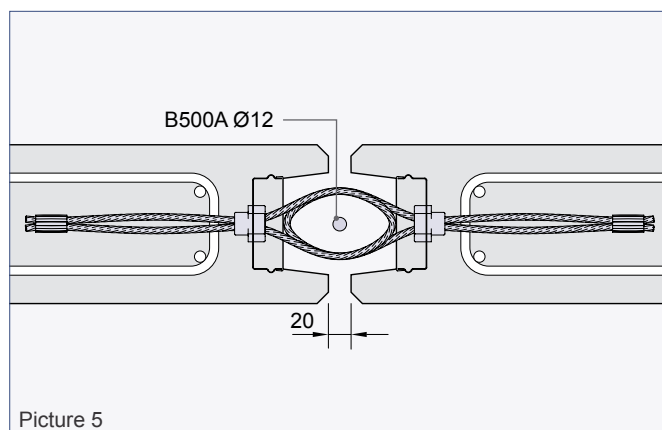


Picture 5

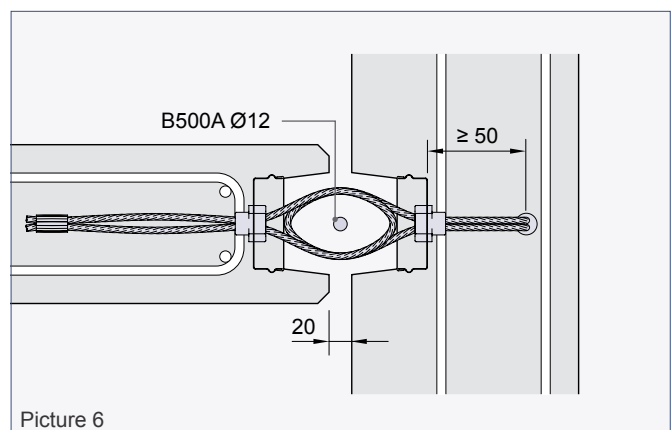

Picture 6

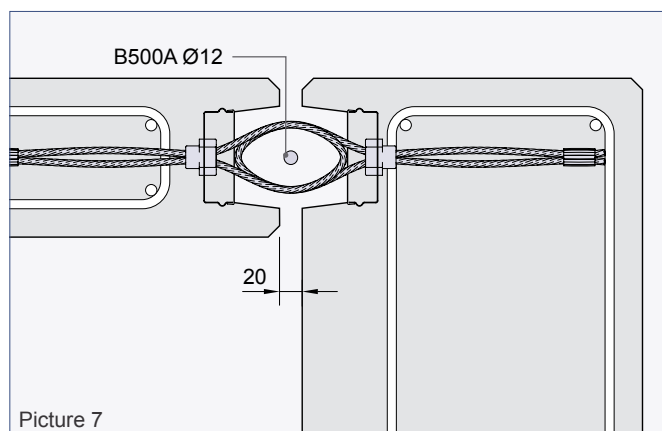

Picture 7

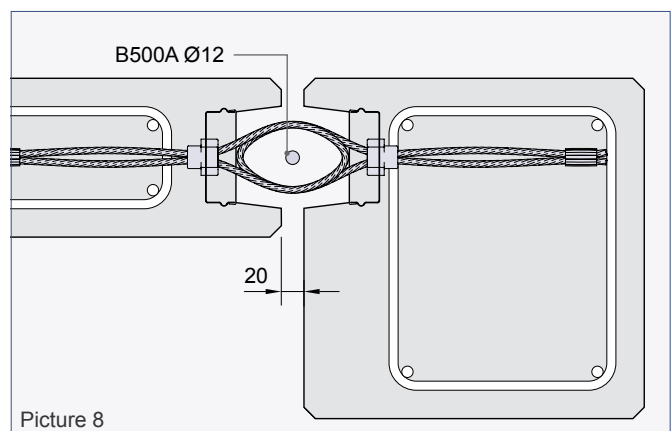

Picture 8

Design and construction

The reinforced precast concrete units to be connected must correspond to EC 2. Furthermore, the precast units have to be made of normal weight concrete with a strength class of at least C30/37 according to EN 206. The structural engineer is responsible to design the elements and to prove the joint connection according to the German national technical approval (Z-21 8-1840).

Values for the design shear resistance parallel to the wall ($V_{Rd,II}$) as well as right-angled to the wall ($V_{Rd,\perp}$) are as follows:

If there are shear forces right-angled to the joint, a tensile force must be considered, which is one and a half times of the transferred shear force. This tensile force can be transferred via appropriate reinforcement, e.g. arranged as a ring beam, or other constructive measures (e.g. fixed column, friction forces).

If both shear forces occur an interaction is necessary, then the shear force right-angled to the joint ($V_{Rd,\perp}$) can only be considered partly. For this $V_{Rd,\perp}$ must be multiplied with a design factor. Diagram 1 shows the interaction between the shear forces parallel and right-angled to the joint.

Table 2: Design shear resistance parallel and right-angled to the joint (wall level)

Wall thickness h [cm]	Design shear resistance							
	C30/37		C35/45		C40/50		C45/55	
	$V_{Rd,II}$ [kN/Box]	$V_{Rd,\perp}$ [kN/m]	$V_{Rd,II}$ [kN/Box]	$V_{Rd,\perp}$ [kN/m]	$V_{Rd,II}$ [kN/Box]	$V_{Rd,\perp}$ [kN/m]	$V_{Rd,II}$ [kN/Box]	$V_{Rd,\perp}$ [kN/m]
14 ①	40.0	6.2	40.0	7.1	40.0	7.6	40.0	8.1
16 ①		8.9		10.1		10.9		11.6
18		11.9		13.5		14.5		15.4
20		15.0		17.1		18.4		19.6
22		18.4		21.0		22.5		24.0
24		22.0		25.0		26.9		28.6

Design shear resistance $V_{Rd,\perp}$ for wall thicknesses < 18 cm only possible if joint or element length > 100 cm.


The percentage of the shear force right angled to the joint is given in diagram 1 or calculated as follows:

With $V_{Ed,II} \leq 13 \text{ kN/Box}$ it is possible to take $V_{Rd,\perp}$ given in table 2 with 100 % for the design!

With $V_{Ed,II} > 13 \text{ kN/Box}$ $V_{Rd,\perp}$ must be multiplied with the following reduction factor:

$$\text{Reduction factor} = 1/3 + 0.025 \times (40 - V_{Ed,II})$$

$$V_{Rd,\perp} = \text{Reduction factor} \times \text{Tabular value}$$

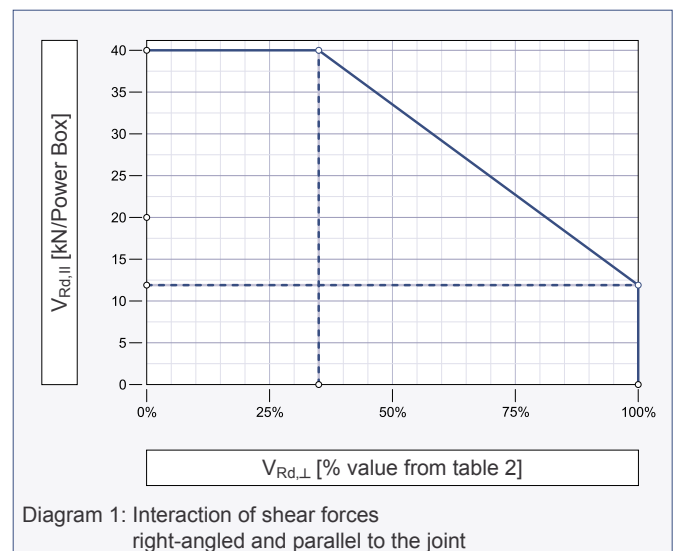

Fire protection



In addition to the actual approval the joint construction is also certified by the University of Kaiserslautern, Germany, for the **fire protection class F180** (with a minimum wall thickness of 15 cm) on the basis of EC 2 and EC 3.

A construction with the Power Box does not transfer fire nor smoke before the 180th minute. Also inadmissible temperature increases above the initial temperature at the beginning do not occur so that the structural stability is guaranteed.

Reinforcement

By means of a timber board the Power Box is installed. The minimum distance between the Power Boxes of 12 cm and to the edge of 15 cm must not be exceeded (Picture 9). In the range of the Power Boxes the precast elements must

be provided with a minimum reinforcement. This reinforcement shall be stirrups $\varnothing 8$ for each wire loop and longitudinal reinforcement $2 \times \varnothing 10$ (Picture 9, alternatively Picture 10).

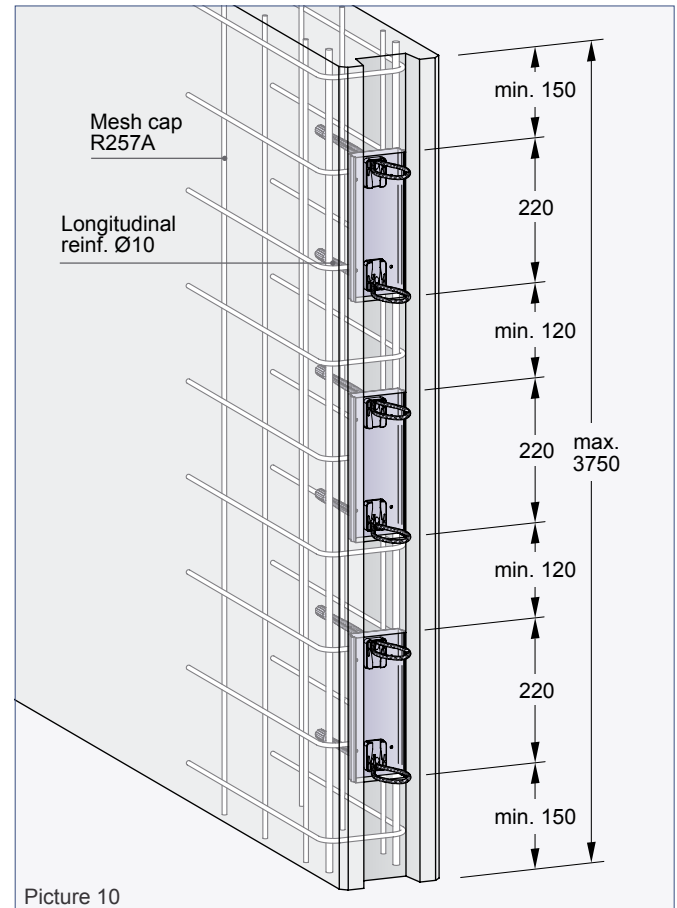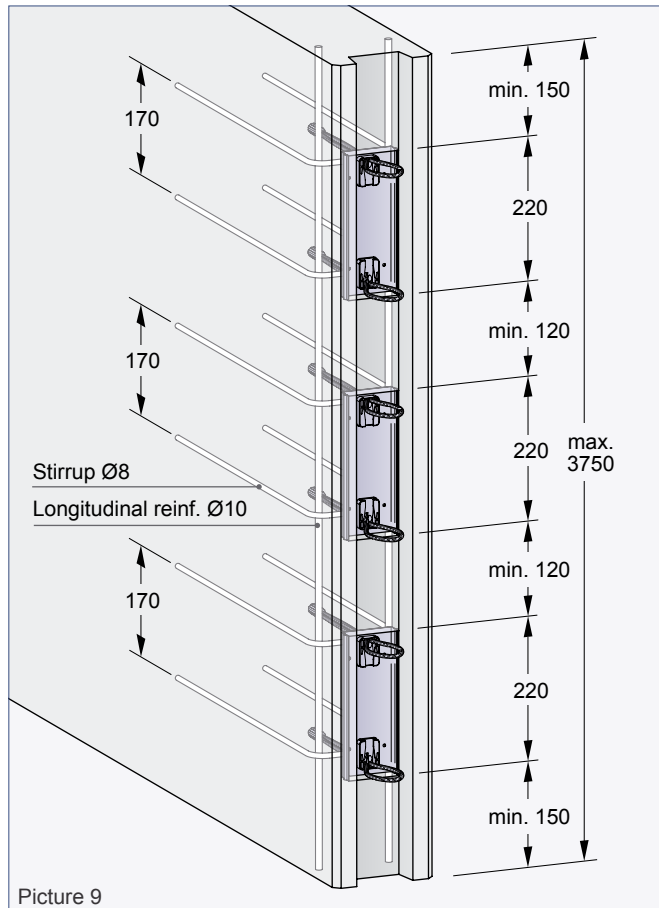

Alternatively, the stirrups can be replaced by a comparable mesh reinforcement (Picture 10).

This requirement is fulfilled e.g. by a mesh reinforcement Type R257A (equivalent: $2.57 \text{ cm}^2/\text{m}$).


The end anchorage of the connecting loops must be aligned right-angled to the Power Box in the precast element. For a vertical installation in the mould the alignment of the wire loops in the precast unit should be ensured by tying those to the reinforcement.



A bending of the end anchorage by the reinforcement is not allowed.



Design example

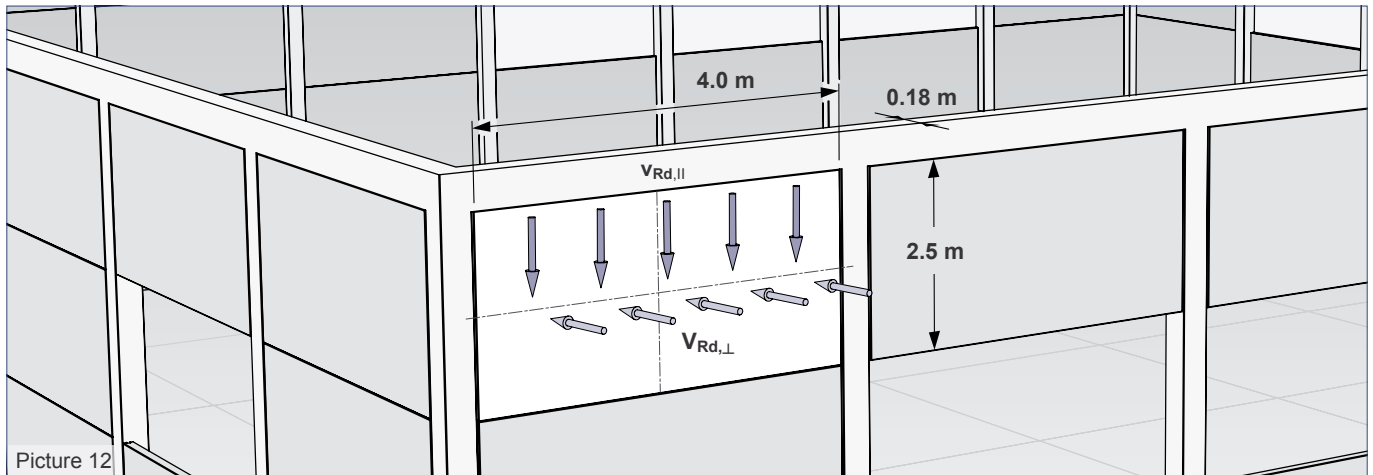

Example wall support

In this example the support reactions of a panel are transferred via the Power Box System.

Not only the dead weight of the panel but also the weight of the beam and the ceiling boards as well as variable loads are taken into consideration.

Actions to the joint:

- Weight of the panel: $2.5 \text{ m} \times 4.0 \text{ m} \times 0.18 \text{ m} \times 25 \text{ kN/m}^3 = 45 \text{ kN}$
- Weight of ceiling boards and beam: 120 kN
- Significant variable force: 30 kN
- Building height $\leq 10 \text{ m}$, wind zone 1, inner land, according to EC 1

Herewith the final design value is calculated (shear force parallel to the joint):

$$V_{Ed,II} = (1.35 \times (45 \text{ kN} + 120 \text{ kN}) + 1.5 \times 30 \text{ kN}) / 2 = 133.9 \text{ kN for each joint}$$

$$V_{Ed,II} = 133.9 \text{ kN} / 2.5 \text{ m} = 53.6 \text{ kN/m for each joint}$$

Shear force right-angled to the joint caused by wind:

$$V_{Ed,\perp} = 1.5 \times (0.8 \text{ kN/m}^2 \times 0.5 \times 2.5 \text{ m} \times 4.0 \text{ m}) / 2 = 3 \text{ kN/m for each joint}$$

Chosen concrete strength: C30/37

Chosen number Power Box pairs: $n = 4$

As a result the resistance forces (right-angled and parallel) are:

Shear force parallel: $V_{Rd,II} = 40 \text{ kN} \times 4 \text{ boxes} / 2.5 \text{ m} = 64 \text{ kN/m}$ (forces for each box: $V_{Ed,II} / 4 = 133.9 \text{ kN} / 4 = 33.5 \text{ kN/box}$)

Shear force right-angled: $V_{Rd,\perp} = 11.9 \text{ kN/m}$ (value from table 2)



If both forces occur at the same time an interaction (Diagram 1) must be considered:

$$\text{Reduction factor} = 1/3 + 0.025 \times (40 \text{ kN} - 33.5 \text{ kN}) = 0.50$$

The reduced shear force right-angled to the joint can be set to 50 %

$$\text{red. } V_{Rd,\perp} = 0.50 \times 11.9 \text{ kN/m} = 5.95 \text{ kN/m} \geq 3.0 \text{ kN/m} = V_{Ed,\perp}$$

This calculation shows that not only the dead weight of the panel but also high forces of beam constructions and wind loads at the same time can be transferred by the Power Box system.

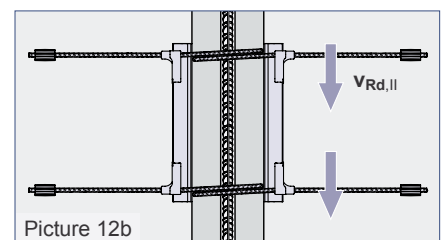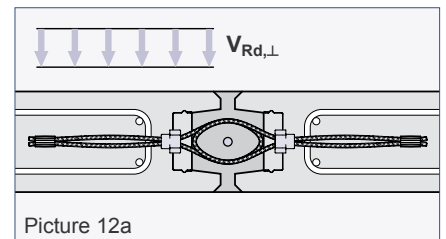


Installation


Production of precast concrete elements with Power Box

The Power Box System works on the principle of a lapped joint. Therefore it is necessary that the opposite connecting loops are arranged on the same height (Picture 22).

A fixation of the Power Box System is possible by nailing as well as hot cluing to the mould (Picture 13 and Picture 14).

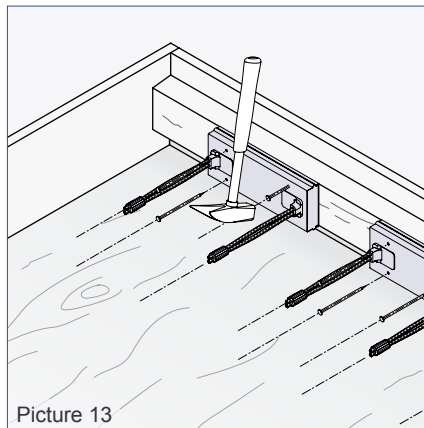

Picture 13

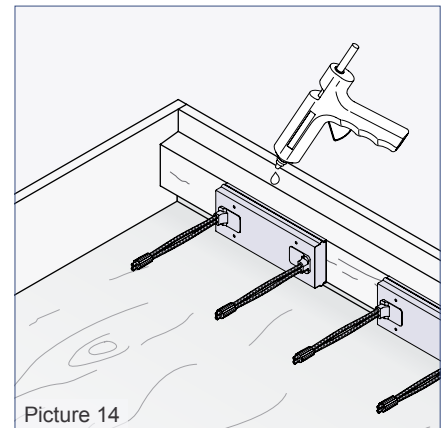


Picture 14


Preparing for mounting

Before grouting the cover of the box has to be removed (Picture 15).

Then, the connecting loops are expanded perpendicularly to the Power Box (Picture 16).

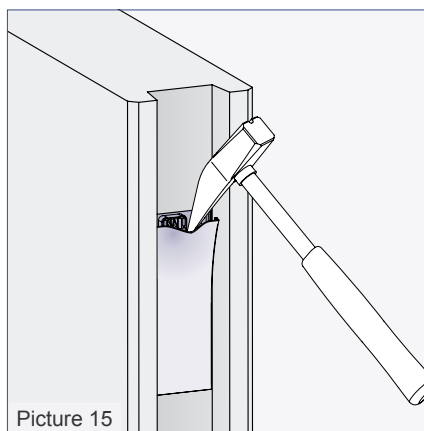

Picture 15

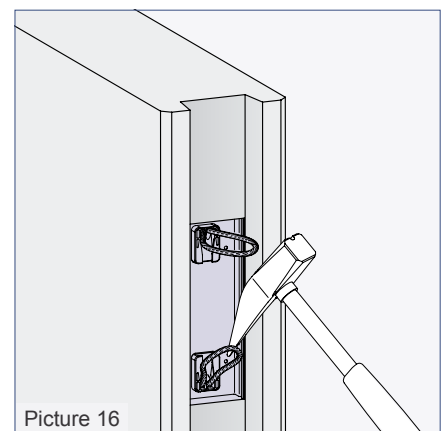

Picture 16

Mounting

Mounting and grouting


If the Power Boxes are installed correctly the loops overlap horizontally with nominal 90 mm as shown in picture 17. Ideally, in vertical direction there is no distance between the loops from both sides (Picture 19).

Nevertheless, the approval for the Power Box System already considers horizontal and vertical tolerances. The maximum tolerances for all cases are shown in picture 20 to 22.


Prior sealing the joint a reinforcement bar ($\varnothing 12$ mm) shall be positioned along the entire length of the joint through the overlapping loops. Make sure when using an expanding waterstop tape that it does not affect the grouting cross section or reduces the required concrete cover for the Power Box System.

The appropriate installation should be inspected visually. After this the joint is sealed on both sides and filled with grouting mortar. The use of a grouting hose with a filling hopper eases this process significantly. It is recommended to fill the joint in sections in order to reduce the pressure of the grouting mortar.


The grouting mortar should be mixed, filled in and compacted according to the processing instructions given on page 11.

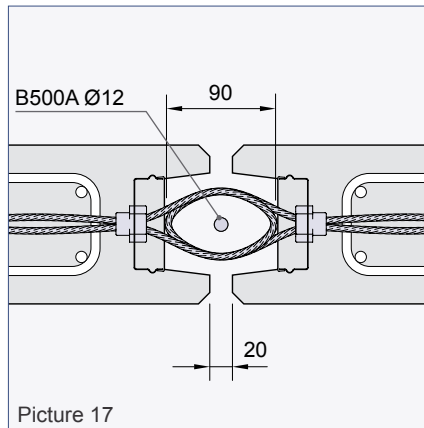


Picture 17

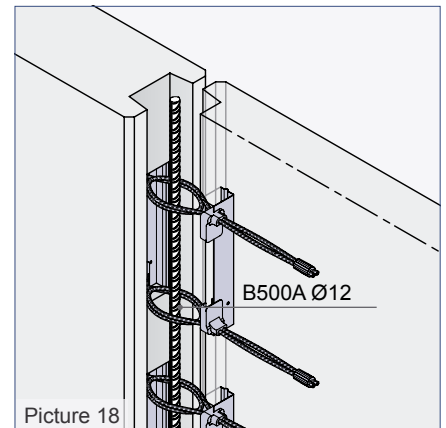


Picture 18

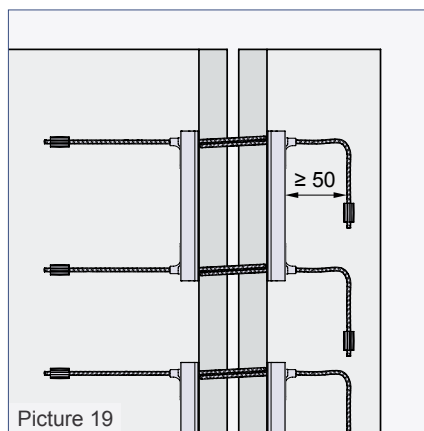


Picture 19

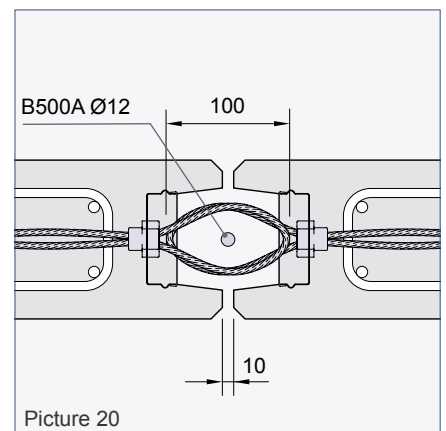

Picture 20

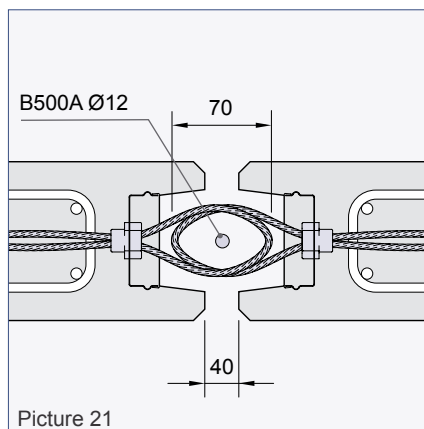

Picture 21

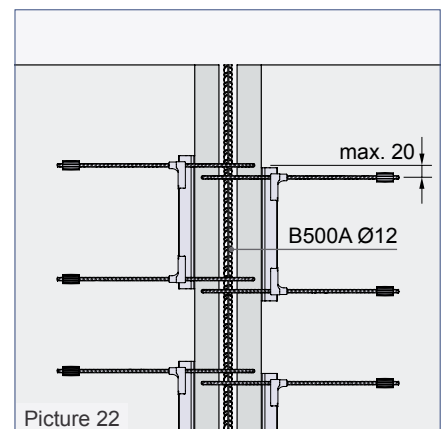

Picture 22

PHILIPP Grouting mortar

Grouting with PHILIPP Grouting mortar

The grouting mortar is a joint mortar for the approved Power Box System. It is a ready-to-use dry mixture on a cement base for grouting of precast concrete units. Furthermore, it is shrinkage-free, has a high early and final strength and good flowability.

Pre-treatment

The surface must be clean of oils, greases etc. and cement slurry at the surface shall be removed. Each time a seal formwork should be used. In order to improve the adhesion the joint surface shall be pre-wetted thoroughly.

Properties

The grouting mortar is free of chlorides. It has a good adhesion to steel and concrete and shows no signs of separation of the components. Furthermore it has a good pumpability and resistance to frost deicing salt. The grouting mortar is produced in consistently high quality and is easy to process. Due to its flowable consistency the mortar is self-levelling and fills out all accessible venting hollow spaces.

Mixing and grouting



Approximately 2/3 of the mixing water is put into the mixer first, then the grouting mortar is stirred in completely. Afterwards the remaining water is used to adjust the consistency. Mixing time is 4-6 minutes, depending on the type of mixing. Finally, the joint is sealed at both sides (if this has not been done before) before it is filled with grouting mortar. The use of a grouting hose with a filling hopper eases the process significantly. It is recommended to fill the joint in sections in order to reduce the pressure of the grouting mortar. Make sure when using an expanding waterstop tape that it does not affect the grouting cross section or reduces the required concrete cover for the Power Box System.

Processing temperature


DIN 1045-2 and DIN EN 206-1 must be taken into consideration when working with the grouting mortar. These standards set a processing temperature to a minimum of +5°C.

Post-treatment

It should be prevented that the mortar dries up too fast for at least three days after the grouting. Appropriate measures are covering with plastic sheets, application of wet tissues or watering.

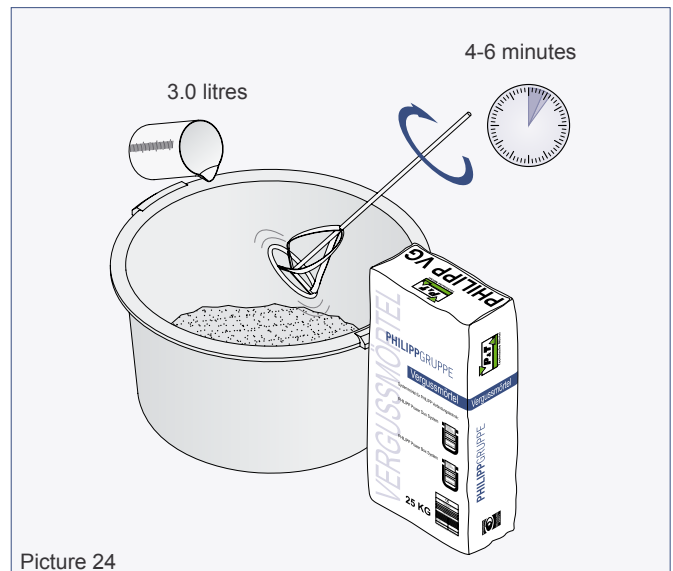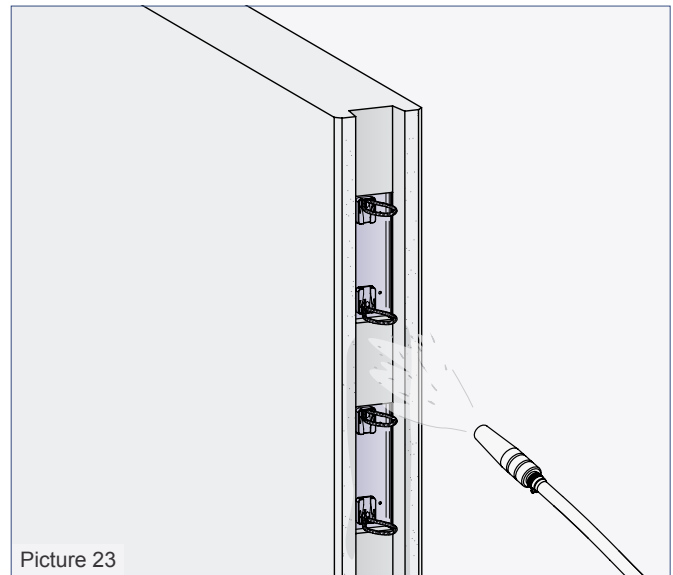


During grouting, make sure that the air can disappear. A careful vibrating can avoid trapped air. The processing time is approximately 60 minutes at 20°C.

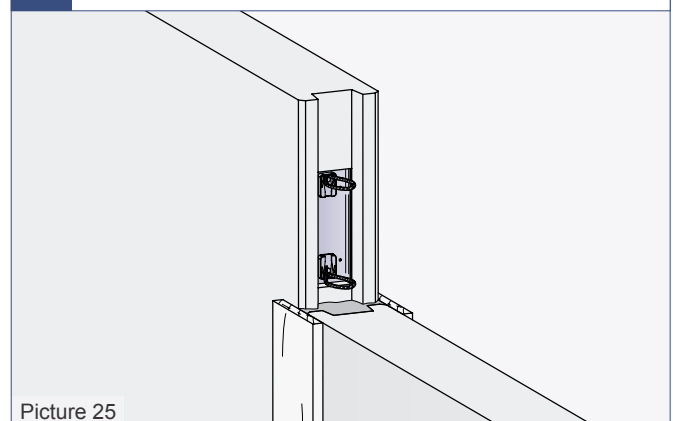

Software / CAD

Calculation tool


In order to design connections with the PHILIPP Power Box System you can find a calculation tool on our website (www.philipp-group.de) - a free software without any registration.

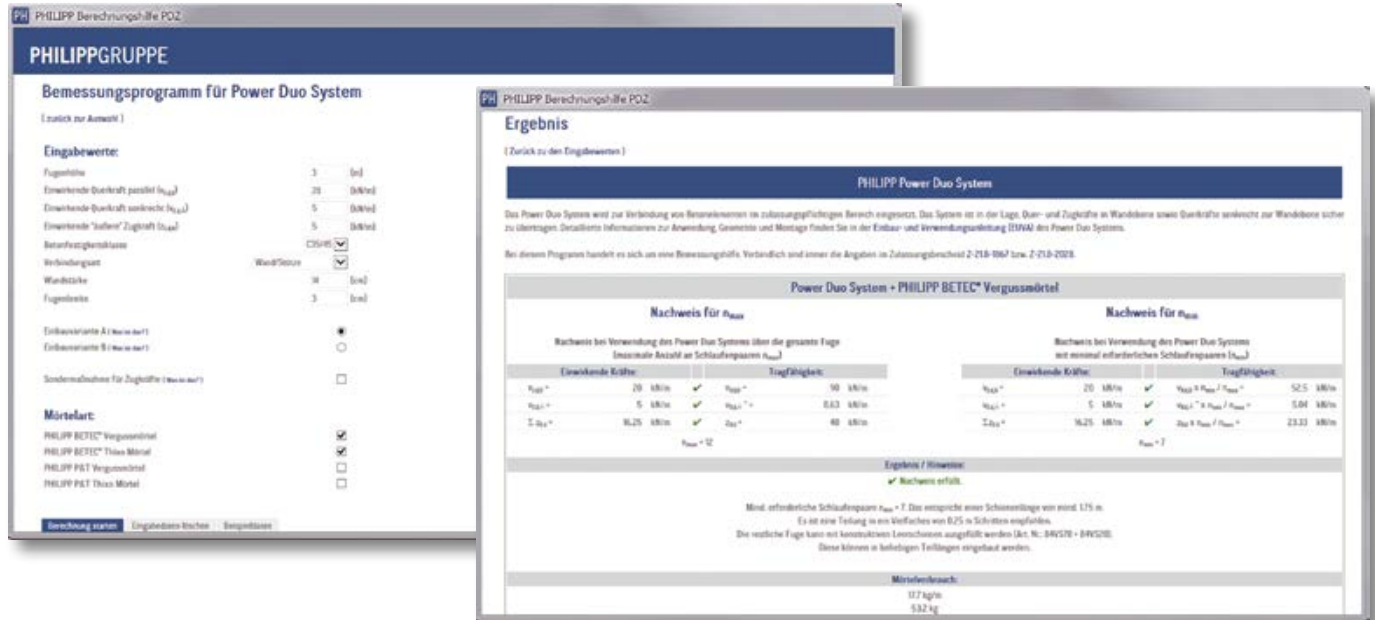

Part library

Time saving during the planning process and support for modelling complicate solutions is getting more and more important and the PHILIPP CAD library helps to work efficient on that matter.

- More than 1,200 PHILIPP products are available as 3D model.
- Universal CAD library with many export formats suitable for all CAD systems (e.g. IFC, DWG)
- Free offer for all people involved in precast building
- Time saving in the design process because of ready-made models and views
- Simply structured catalogue
- Further product details are provided (e.g. weight, dimensions, material and instructions)

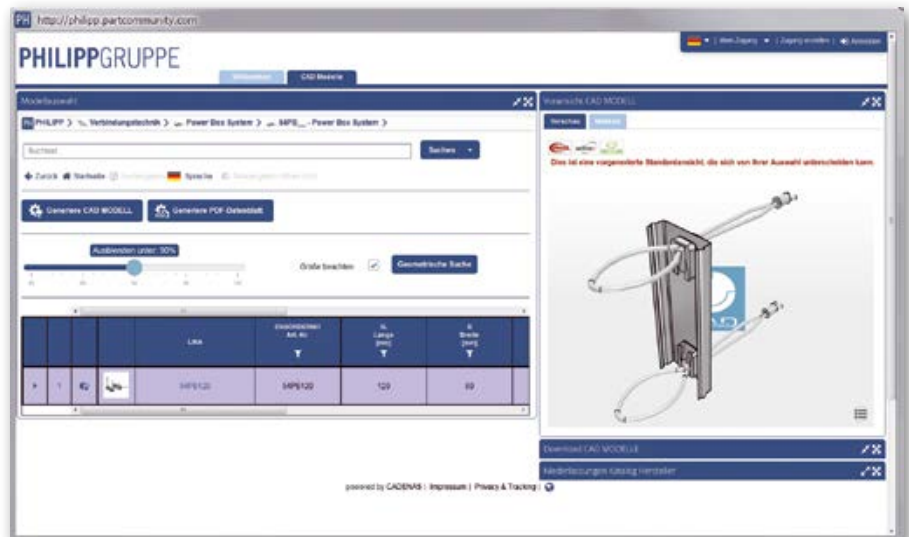

General notes

Table 3: Construction site checklist

Step	What to do	Comment
1	Open box	Remove cover
2	Inspection of the box	Pay attention to clean surfaces, if necessary clean again
3	Expand the connecting loops	Pay attention to the 90° position of the loops
4	Align concrete units	Pay attention to admissible tolerances
5	Install joint reinforcement	Along the entire length of the joint
6	Pre-wetting of grouting joints	Improvement of adhesion
7	Seal both sides of the joint	Use form work, timber boards or expanding waterstop tape
8	Joint grouting	Pay attention to the instructions regarding ambient temperature, compacting, processing time, etc.
9	Demoulding	After hardening of the mortar
10	Post-treatment of the joint	Protection against rapid drying

Table 4: Grout consumption

Element thickness [mm]	Joint width [mm]	Grout consumption per 1 m joint and 2 boxes/m	
		[l/m]	[kg/m]
140	20	11.4	21.9
160	20	11.8	22.7
180	20	12.2	23.4
200	20	12.6	24.2

Please consider also the German approval of the Power Box, the fire protection test report (only available in German) and the datasheets for the grouting mortar. You can find these brochures on www.philipp-group.de or are available on request.



PHILIPP Grouting mortar is available from

PHILIPP GmbH

Tel.: +49 (0) 6021 / 40 27-300

PHILIPPGROUP

P&T Technische Mörtel GmbH & Co. KG

Order Processing Dept.
Bataverstraße 84
41462 Neuss, Germany



Tel.: +49 (0) 2131 / 56 69-0

Fax: +49 (0) 2131 / 56 69-22

Notes:

Our customers trust us to deliver. We do everything in our power to reward their faith and we start each day intending to do better than the last. We provide strength and stability in an ever-changing world.

Welcome to the PHILIPP Group

Sustainable
solutions



PHILIPP GmbH

Lilienthalstrasse 7-9
D-63741 Aschaffenburg
Phone: +49 (0) 6021/40 27-0
Fax: +49 (0) 6021/40 27-440
info@philipp-gruppe.de

PHILIPP GmbH

Roßlauer Strasse 70
D-06869 Coswig/Anhalt
Phone: +49 (0) 34903/6 94-0
Fax: +49 (0) 34903/6 94-20
info@philipp-gruppe.de

PHILIPP GmbH

Sperberweg 37
D-41468 Neuss
Phone: +49 (0) 2131/59 18-0
Fax: +49 (0) 2131/59 18-10
info@philipp-gruppe.de



PHILIPP Vertriebs GmbH

Leogangerstraße 21
A-5760 Saalfelden / Salzburg
Phone + 43 (0) 6582 / 7 04 01
Fax + 43 (0) 6582 / 7 04 01 20
info@philipp-gruppe.at

For more information visit our website: www.philipp-group.de